




Recommended For



Commercial Roof



Utility Scale Ground Mounted



TPSP6U

Poly Crystalline
Photovoltaic Module

230W/235W/240W/245W/250W



Plus power tolerance (0-3%) to ensure the high reliability of power output



Modules certified by TÜV to withstand high level of wind loads (2400 Pa) and snow loads (5400 Pa)*



Anti-reflective, hydrophobic layer of module surface (proprietary 800° C online coating technology) improves light absorption and reduces surface dust



Easy installation and minimal maintenance with compatibility to industry standard inverters and mounting systems



Special PV Module Insurances by world leading insurance company guarantees the benefit of PV investors and PV module users



Junction box and bypass diodes guarantee the modules free of overheating and "hot spot effect"



Modules' excellent performance under low light environments (mornings, evenings, and cloudy days) create better kWh/kW ratio and produce average 2-3% more electricity in the field

Guaranteed Performance**

10 Years
Manufacturing Warranty

12 Years Warranty,
90% Power Output

25 Years Warranty,
80% Power Output

Free module recycling through
membership in the PV Cycle Association.

Choosing Topray Solar

- Professional solar producer and solutions provider since 1992, reliable partner of global distributors, installers and project integrators.
- The most vertically integrated solar manufacturer in the industry with production of ingots, wafer, solar cells and modules using both mono crystalline and multi crystalline technology.
- Manufacturing with international quality standards and environment management system: ISO 9001 and ISO 14001.
- Global distribution with local warehousing, delivery and after sales services.



- Minimal wiring effort required as the module has high reverse current resistance.
- Most updated design with drainage holes in the frame ensures the modules to withstand various weather conditions.



* Please refer to Topray Safety and Installation Manual for details.


** Please refer to Topray Limited Product Warranty for details.

TPSP6U 230W/235W/240W/245W/250W Poly Crystalline Photovoltaic Module

MECHANICAL SPECIFICATION

Cell Type	Poly crystalline 156×156 mm (6 inches)
Number of cells	60 (6×10)
Dimensions (A×B×C)	1650×992×40mm
Weights	19kg
Front Glass	3.2 mm Low iron tempered glass
Frame	Anodized aluminum alloy
Junction Box	IP 65, with bypass diodes
Connector	MC4 compatible
Output Cables	TÜV, length 900mm, 4.0mm ²

MECHANICAL DRAWINGS

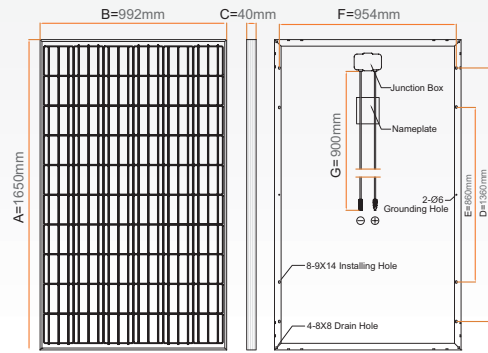

ELECTRICAL CHARACTERISTICS

PERFORMANCE AT STANDARD TEST CONDITION (STC: 1000 W/m², 25 °C, AM 1.5)

Module Series	TPSP6U – Topray Universal				
Maximum Power at STC (P _{max})	230W	235W	240W	245W	250W
Short Circuit Current (I _{sc})	8.39A	8.52A	8.62A	8.69A	8.80A
Open Circuit Voltage (V _{oc})	36.60V	36.80V	36.90V	37.10V	37.20V
Maximum Power Current (I _{mpp})	7.80A	7.92A	8.06A	8.14A	8.6A
Maximum Power Voltage (V _{mpp})	29.50V	29.70V	29.80V	30.10V	30.30V
Encapsulated Cell Efficiency	15.75%	16.09%	16.44%	16.78%	17.12%
Module Efficiency	14.14%	14.44%	14.75%	15.06%	15.37%
Power Tolerance	0/+3%	0/+3%	0/+3%	0/+3%	0/+3%

PERFORMANCE AT NORMAL OPERATING CELL TEMPERATURE (NOCT: 800W/m², 47±3 °C, AM 1.5)

Maximum Power (P _{max})	168W	172W	176W	179W	183W
Short Circuit Current (I _{sc})	7.08A	7.18A	7.27A	7.33A	7.42A
Open Circuit Voltage (V _{oc})	33.90V	34.10V	34.20V	34.40V	34.50V
Maximum Power Current (I _{mpp})	6.41A	6.51A	6.62A	6.69A	6.79A
Maximum Power Voltage (V _{mpp})	26.30V	26.40V	26.50V	26.80V	27.00V


The typical relative change in module efficiency at an irradiance of 200W/m² in relation to 1000W/m² (both at 25 °C and AM 1.5 spectrum) is less than 6%.

TEMPERATURE CHARACTERISTICS

Nominal Operating Cell Temperature (NOCT)	47±3 °C
Temperature Coefficient of P _{max} (γ)	-0.43%/K
Temperature Coefficient of V _{oc} (β)	-0.36%/K
Temperature Coefficient of I _{sc} (α)	0.05%/K

PACKING CONFIGURATION

Container	20' GP	40' HQ
Pieces per pallet	25	25
Pallets per container	6	28
Pieces per container	290	700

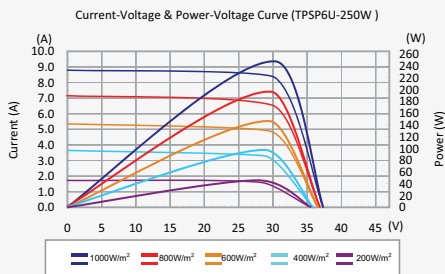

SYSTEM INTEGRATION PARAMETERS

Maximum system voltage	DC 1000V
Maximum Series Fuse	16A
Maximum reverse current	21.5A
Increased snowload acc. to IEC 61215	5400Pa
Operating Temperature	-40~+85 °C
Number of bypass diodes	6

QUALIFICATIONS AND CERTIFICATES

CE-Compliant, IEC 61215 (Ed.2), IEC 61730 (Ed.1) application class A, TÜV Safety Class II, UL 1703



DEALER INFORMATION BOX